



# SmartAir Master

Compressed Air Management System

**NEW**



Engineered to Save

Modern compressed air stations are required to be more energy efficient, reliable and meet higher standards of safety. To achieve this, demand-responsive, intelligent sequencers are becoming increasingly important.

## BENEFITS AT A GLANCE:

- User-friendly and self-explanatory color graphics displayed via touch screen
- Maximum energy and cost savings by reducing off-load times to a minimum and operating all the system compressors to the narrowest pressure band
- Service technicians can immediately analyze the cause of any maintenance required
- Simple installation with low cabling costs using a data cable with a “bus structure”
- Complete overview of the status of the entire compressed air station
- The DELCOS 3100, DELCOS Pro and DELCOS 1000 controllers can be connected without any extra hardware

The SmartAir Master can intelligently control up to 12 compressors of any combination, fixed or variable speed, and will reduce energy consumption by tightening the network pressure to the smallest possible band, keeping off-load running to the absolute minimum.

Where varying compressors are installed, maximum energy savings is a result of using the correct combination of compressors to meet system demand.

Where compressors of the same capacity are installed, the sequencer will equalize the running hours, offering even greater savings by optimizing the service intervals.

### Alternative compressors can be connected via two modules



Compressor module (VSD) for alternative compressors with speed control



Compressor module (STD) for alternative compressors with fixed speed and/or half-/full-load control

## ⇒ SYSTEM COMPONENTS

Direct connection of CompAir compressors using simple data cable in a “bus structure”.

Accessories such as dryers, filters and condensate drains are easily connected to the SmartAir Master directly or to an extension module.

System data can be transferred to and used by external controls such as building management systems via:

- ModBus-RTU
- PROFIBUS

## ⇒ COMMISSIONING

Commissioning is quick and easy using the innovative “commissioning wizard”, which guides you every step of the way. The help functions give you quick access to connection diagrams and controller settings, which can be viewed on the SmartAir Master screen.



## FUNCTIONS

### Profile Programming

Up to 12 system profiles can be programmed. An energy efficient profile is created by inputting the compressor priority, pressure band, and air receiver capacity. Profiles can then be selected by the integrated timer or via digital inputs.

### System Demand Control



The intelligent SmartAir Master calculates the system demand and then selects the compressors best suited to meet the profile, eliminating running oversized compressors and wasting energy.

### Data logging

The integrated SD card drive allows the system to be data logged. (MS Excel compatible.)

### Visualization


Using the optional web server module the SmartAir Master can be visualized externally on a PC module using a standard browser (e.g. Internet Explorer) or via local network (LAN.)

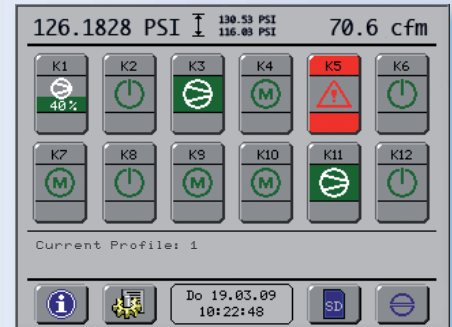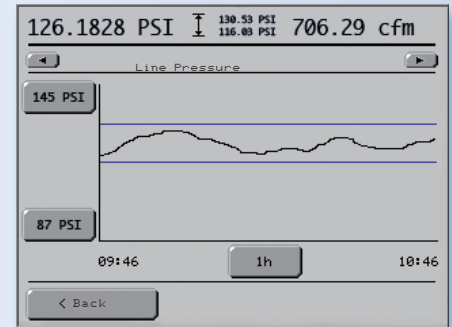

## OPERATION AND PROGRAMMING VIA FULL-COLOR TOUCH SCREEN


The extremely user-friendly and fully self-explanatory large color graphics display with touch screen gives you a quick overview of the compressed air supply and connected compressors at any time, displaying useful information such as:

- Network w range and compressed air consumption
- Individual status display of each compressor connected
- Fault and warning messages for each compressor are listed along with the exact time and date in plain text in the fault memory
- Network pressure and volumetric flow diagrams can be accessed
- Bar charts of operating and load hours for every individual compressor
- Up to 17 different language settings are available

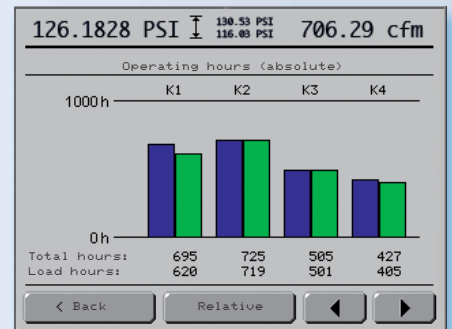

# OVERVIEW OF SYSTEM COMPONENTS

## SmartAir Master

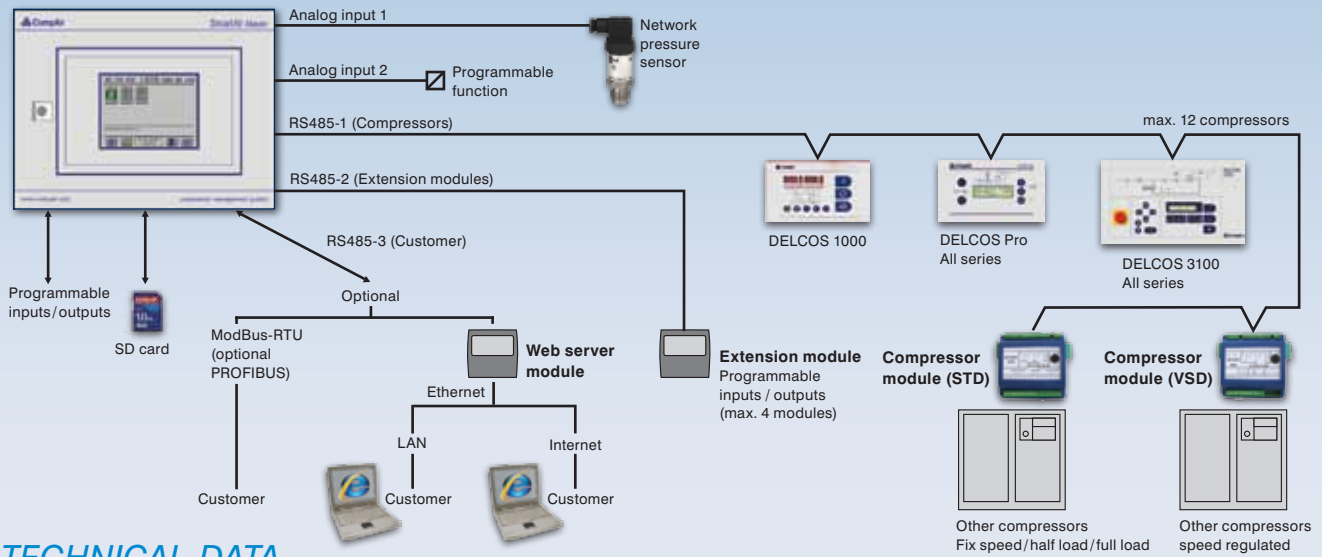

## TECHNICAL DATA

Electrical connection	
System	1~/N/PE
Voltage	110/230V +/-10% 50/60 Hz
Display	
Type	Color graphics display with touch function
Screen size	5.7"
Interfaces	
Analog inputs	2
Digital inputs	3
Relay outputs	2
Memory card	
Type	SD card
Connection for compressors	
Quantity	max. 12 Compressors
Interface	RS485
Distance from SmartAir Master	max. 3937 ft
Customer interface	
Interface	RS485
Distance from SmartAir Master	max. 3937 ft
Protocol	ModBus-RTU or PROFIBUS (optional)
Permissible ambient temperatures	
Operations	32° to 131 °F
Storage	-13° to 167°F

EMC conformity	
Emissions	DIN EN 61000-6-3
Interference suppression	DIN EN 61000-6-2
Housing	
Dimensions (W x H x D)	15" x 12" x 6"
Design	Steel plate housing
Type of protection	IP54
Weight	24lb.
Scope of supply	
<ul style="list-style-type: none"> <li>- SmartAir Master, including cable glands</li> <li>- Network pressure sensor</li> <li>- Set of plugs for connecting to compressor controllers</li> <li>- SD card</li> <li>- Documentation</li> </ul>	
Options	
Compressor module (STD)	For connecting standard external compressors
Compressor module (VSD)	For connecting speed-controlled external compressors
Extension module	For extending the programmable inputs/outputs
PROFIBUS module	For connection to a PROFIBUS network
Web server module	For visualizing via LAN or online


CompAir policy is one of continuous improvement and we therefore reserve the right to alter specifications and prices without prior notice. All products are sold subject to the Company's conditions of sale.



www.CompAir.com sales@CompAir.com

CompAir USA  
1301 North Euclid Avenue  
Princeton, IL 61356  
United States of America  
Tel (866) 994-8807  
Fax (800) 443-7790

CompAir Canada  
871 Cranberry Court  
Oakville, Ontario L6L 6J7  
Canada  
Tel (905) 847-0688  
Fax (905) 847-8124



©2010 Gardner Denver, Inc. CU-SMARTAIR 1st Ed. 8/10

Printed in U.S.A.



Member

