

7 1/2 -10 H.P. Models

K Series Two-Stage Air Compressors

STANDARD FEATURES


KC10 Unit Includes:

- ✓ Totally enclosed, OSHA type steel belt guard
- ✓ ASME/CRN air receiver
- ✓ Loadless starting
- ✓ Automatic start/stop
- ✓ ASME safety relief valves
- ✓ High efficiency industrial NEMA motor
- ✓ Discharge air service valve

OPTIONS AVAILABLE

- ✓ Low-oil level switch
- ✓ Electronic Tank Drain
- ✓ Magnetic Starters
- ✓ Vibration pads
- ✓ Alternate tank sizes

KC10 Pump

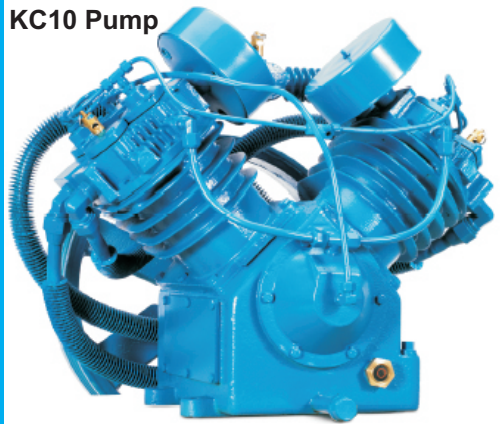

KC10-80H

K Series units are assembled in Canada, in our own factory, using the best quality components available in North America. Therefore, we can provide the highest quality & the most cost effective cast iron Two-Stage Compressor in the market.

K Series Air compressors come in vertical or horizontal tank mounted units with 5 - 25 H.P. motors. Our models provide capacity levels between 20 and 93 acfm @ 100 psig. The K Series Two-Stage Air Compressor comes in both electric & gas engine models.

We stand behind the workmanship of our product with a One-Year Warranty covering all components including the pump, motor and tank on all K Series air compressors.

SPECIFICATIONS

SPECS	VERTICAL TANKS				HORIZONTAL TANKS			
UNIT MODEL	KC7.5-80V	KC7.5-120V	KC10-80V	KC10-120V	KC7.5-80H	KC7.5-120H	KC10-80H	KC10-120H
MOTOR H.P.	7.5	7.5	10	10	7.5	7.5	10	10
TANK SIZE *	80 g	120 g	80 g	120 g	80 g	120 g	80 g	120 g
ACFM @100 psig (175 psig max.)	33	33	40	40	33	33	40	40
APPROX. WT. (lbs)	700	970	720	990	700	970	720	990
DIMENSIONS (LxWxH)	32 x 24 x 74	39 x 30 x 77	32 x 24 x 74	39 x 30 x 77	64 x 23 x 47	70 x 20 x 52	64 x 23 x 47	70 x 20 x 52

KC10 Pump Includes:

- ✓ Cast iron cylinders, heads and crankcase for long, dependable compressor life
- ✓ Ring Flo lubrication
- ✓ Swedish steel concentric type inlet and discharge valves for low maintenance & high efficiency
- ✓ High efficiency inter cooler with steel fins on copper tubes designed for maximum heat dissipation
- ✓ Cast iron connecting rods with replaceable automotive type insert bearings
- ✓ Oil sight gauge
- ✓ High volume, statically balanced flywheel/cooling fan for improved cooling air flow
- ✓ Cast iron crankshaft supported on both ends by oversized tapered roller bearings
- ✓ Head unloaders
- ✓ Centrifugal unloader
- ✓ Combination filter - silencer

Compressed Air International Inc.

Toll Free: 1-888-826-7247
 Email: info@ca-intl.com
 Web Site: www.ca-intl.com

Vaughan Location:
 60 Haist Ave. U # 1,
 Woodbridge, Ont. L4L 5V4
 Phone: (905) 850-9888
 Fax: (905) 850-5676

Guelph Location:
 5477 Hwy 6 North,
 Guelph, Ont. N1H 6J2
 Phone: (519) 837-0450
 Fax: (519) 837-0453



K-Lub 4X Compressor Lubricant
 Specially designed for your K Series Reciprocating Compressor

Distributed by: